

TECHWEIGH TW-Z2 CRANE SCALE PACKAGE

1) TW-Z2 Load Cell

Standard Features

- Steel Shell
- Super-bright LCD and LED display (height: 40mm)
- Two-sided display on load cell
- Three-dot linear calibration
- Revisable acceleration of gravity
- Automatic battery voltage detection when turn-on
- Automatic data saving when power-off
- Automatic standby and power-saving mode in 5 minutes without use
- Automatic shut-off in 1.5 hours without usage
- Sealed and maintenance-free rechargeable battery
- Accuracy Class: OIML III
- Taring Range: 100% scale capacity
- Display Steady Time: 5-10 seconds
- Ultimate Safety Factor: 4
- Maximum Safety Overload: 125% scale capacity
- CE certificate up to 20T





2) DP100-B LED Display



Standard Features

- Can work alone:
 - Super-bright LED display (word height: 100mm)
 - Three-dot linear calibration
 - Automatic zero tracking
 - Automatic battery voltage detection when turn-on
 - Automatic standby and economic power mode in 5 minutes and shut-off in 1.5 hours without use
 - Adjustable acceleration of gravity
- Can work together with TW3163E indicator

TECHWEIGH

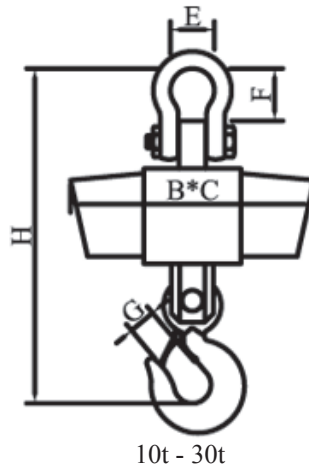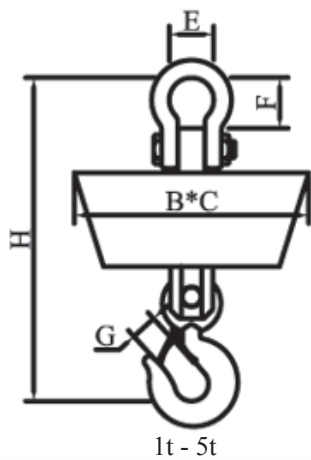

Model	Capacity (kg)	Graduation (kg)	Dimensions:				
			H	E	F	G	B*C
TW-1-Z2	1000	.5	445	56	65	22	400*270
TW-2-Z2	2000	1	460	56	65	25	400*270
TW-3-Z2	3000	1	495	56	65	32	400*270
TW-5-Z2	5000	2	595	72	90	36	400*270
			620*	85	115		
TW-10-Z2	10000	5	690	90	110	50	450*310
			750*	110	160		
TW-15-Z2	15000	5	885	140	230	60	450*310
TW-20-Z2	20000	10	930	140	230	70	450*310
TW-30-Z2	30000	10	1110	160	260	90	500*310
TW-40-Z2	40000	20	1200	180	220	130	440*410
			1270*	180	290		
TW-50-Z2	50000	20	2500	1310	200	130	440*410
				1380*	230		

* Option, extended shackle

