


# TW85114

## INTERCHANGEABLE PRODUCTS:

- Fairbanks 93014, 63951, 93186, 64166, 93014, 63952, LCF-HR4020
- Flintec RC1
- Rice Lake RL75114
- Sensortronics 65114

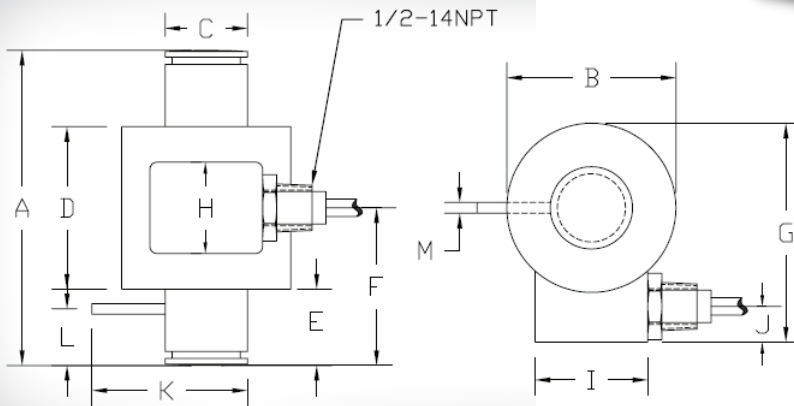

## DIMENSIONS

Rated Capacity	A	B	C	D	E	F	G	H	I	J	K	L	M
50K	6.00	3.00	1.46	2.88	1.56	3.00	3.88	1.62	2.00	0.50	2.88	1.00	0.038

## SPECIFICATIONS

Full Scale Output: 2.0 mV/V  
 Temperature: Compensated range  
 -14 deg. F to 104 deg. F  
 -10 deg. C to 40 deg. C  
 Safe Overload: 150% Full Scale  
 Rated Excitation: 10-15V DC  
 Bridge Resistance: 1000 ohms  
 Zero Balance: +/- 1.00 F.S.

Insulation Resistance: >5000megohms  
 Cable Length: 50 ft.  
 Cable Coloring: Red...+Excitation  
 Black...-Excitation  
 Green...+Signal  
 White...-Signal  
 Warranty: 1-year limited warranty