
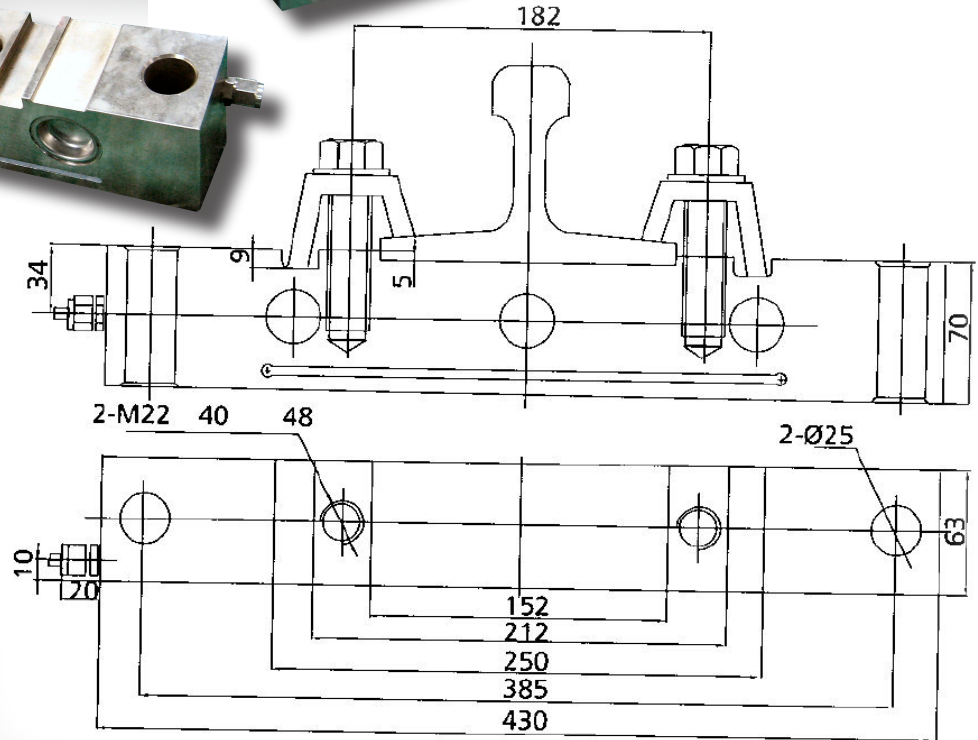


TW-BTG-A

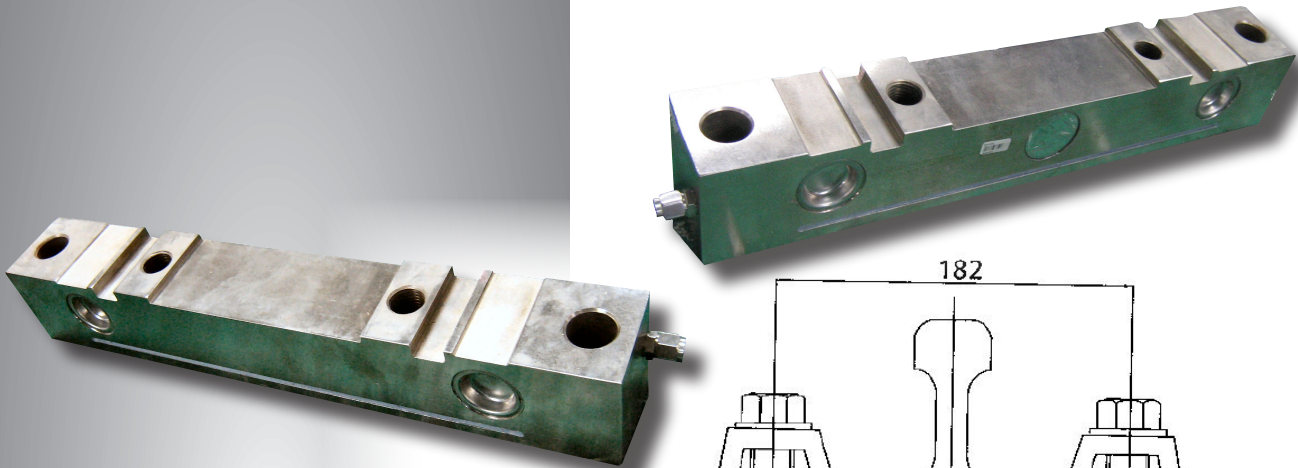

SPECIFICATIONS

Full Scale Output: 2 mV/V
 Capacity: 15-30T
 Temperature: Compensated range
 -54 deg. F to 126 deg. F
 -30 deg. C to 70 deg. C
 Safe Overload: 150% Full Scale
 Rated Excitation: 10V DC (15V maximum)

Insulation Resistance: 5000megohms
 Cable Length: 35ft./12m
 Cable Coloring: Red...+Excitation
 Black...-Excitation
 Green...+Signal
 White...-Signal
 Warranty: 1-year limited warranty
 Combined Error: 0.03% Full Scale

TECHWEIGH