


TWRC

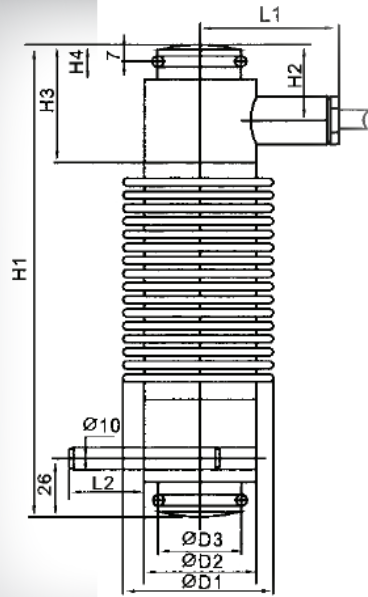

DIMENSIONS

Rated Capacity	L1	L2	H1	H2	H3	H4	D1	D2	D3
30T	62	33	192	34	51	15	72	50	37
40T	69	26	225	36	57	16	85	64	37
50T	69	26	225	36	57	16	85	64	54.4

SPECIFICATIONS

Full Scale Output: 2.0 +/- 0.005 mV/V
 Temperature: Compensated range
 -22 deg. F to 158 deg. F
 -30 deg. C to 70 deg. C
 Safe Overload: 150% Full Scale

Max. Overload
 Rated Excitation:
 Zero Balance:
 Insulation Resistance:
 Warranty:

250% Full Scale
 10-15V DC
 +/- 1.00 F.S.
 >5000megohms
 1-year limited warranty

TECHWEIGH