
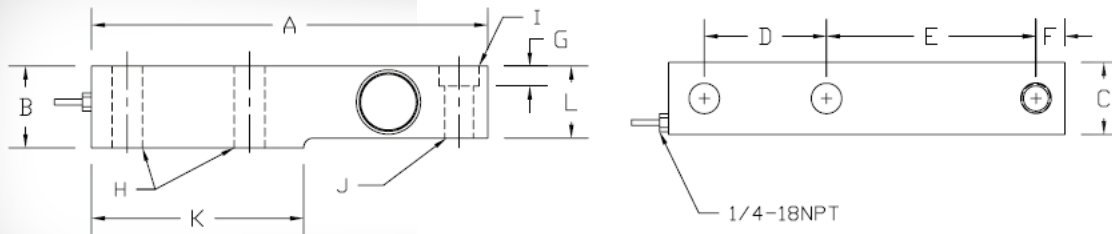


TWSB3

INTERCHANGEABLE PRODUCTS:

- Rice Lake RLSSB
- Revere SSB
- HBM SB3 Artech SS30610

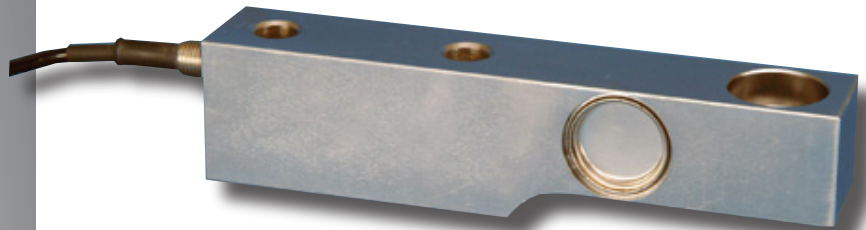

DIMENSIONS

Rated Capacity	A	B	C	D	E	F	G	H	I	J	K	L
1K - 5K	8.00	1.88	1.44	2.50	3.88	0.88	0.47	0.53	1.19	0.68	4.00	1.44
10K	9.25	2.75	1.88	2.62	4.88	0.94	0.62	0.88	1.63	1.00	4.62	1.88

SPECIFICATIONS

Full Scale Output: 2.0 mV/V
 Temperature: Compensated range
 -14 deg. F to 122 deg. F
 -10 deg. C to 50 deg. C
 Safe Overload: 150% Full Scale
 Rated Excitation: 10-15V DC
 Bridge Resistance: 350 ohms
 Zero Balance: +/- 1.00 F.S.

Insulation Resistance: >5000megohms
 Cable Length: 30 ft.
 Cable Coloring: Red...+Excitation
 Black...-Excitation
 Green...+Signal
 White...-Signal
 Warranty: 1-year limited warranty

TECH WEIGH