
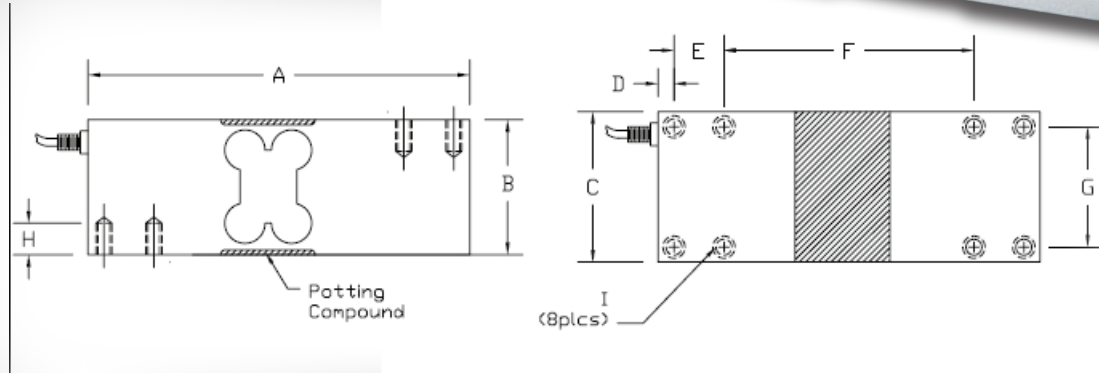


TWUDA

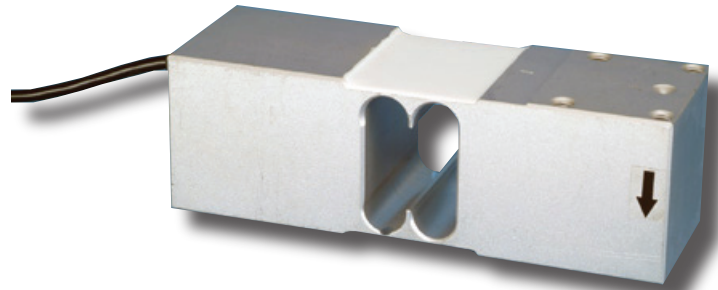

DIMENSIONS

Rated Capacity	A	B	C	D	E	F	G	H	I
50 - 635 Kg	7.40	2.45	2.50	0.21	1.38	4.21	1.97	0.62	5/16-18UNC

SPECIFICATIONS

Full Scale Output: 2.0 mV/V
 Temperature: Compensated range
 -14 deg. F to 104 deg. F
 -10 deg. C to 40 deg. C
 Safe Overload: 150% Full Scale
 Rated Excitation: 10-15V DC
 Bridge Resistance: 350 ohms
 Zero Balance: +/- 1.00 F.S.

Insulation Resistance: >5000megohms
 Cable Length: 10 ft.
 Cable Coloring: Red...+Excitation
 Black...-Excitation
 Green...+Signal
 White...-Signal
 Warranty: 1-year limited warranty

TECH WEIGH